



AC BLOWER
121x121x37mm



Spiral Housing: Fiberglass-Reinforced Polycarbonate

Housing Base: Galvanized Steel Plate

Blade: Thermoplastic PBT, UL 94V-0

Insulation Resistance: 100MΩ, 500VDC/min between bare wire and frame

Dielectric Strength: 1500VAC for one minute

Operation Temperature: -20°C-70°C(Humidity 35%-85%RH)

Storage Temperature: -40°C-85°C(Humidity 35%-85%RH)

Motor Protection: Impedance Protected

Weight: 625 g **Packing:** 20PCS/CTN





ES

IP

Model Number	Voltage (VAC)	Frequency (Hz)	AirFlow (CFM)	Stat.Pres. (mm-H ₂ O)	Noise (dBA)	Speed (RPM)	Current (mA)	Power (W)	Available Bearing	Curves
FBA1237B11W5-51	115	50/60	22.0/23.0	10.7/15.7	53.0/54.0	2,500/2,500	270/240	21/19	B,S	①/②
FBA1237B22W5-51	230	50/60	22.0/23.0	10.7/15.7	53.0/54.0	2,600/2,700	140/120	21/20	B,S	①/②

• For "Sleeve" bearing version, change the "B" in the model number to "S".

Specifications are subject to change without notice

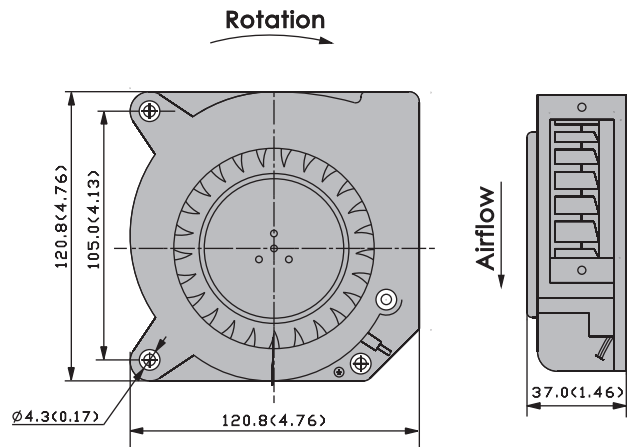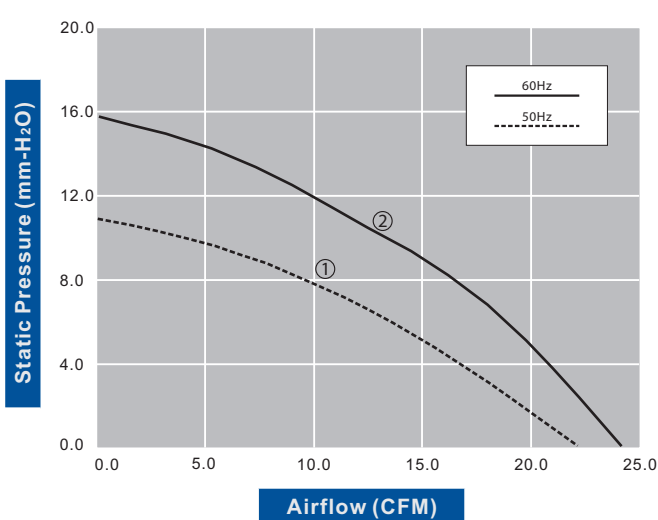

unit: mm(inch)

AC BLOWER 125x126x40mm



Housing: Die-Cast Aluminum, Painted Black
 Blade: Thermoplastic PBT, UL 94V-0
 Insulation Resistance: 100M Ω , 500VDC/min between bare wire and frame
 Dielectric Strength: 1500VAC for one minutue
 Operation Temperature: -10°C~70°C(Humidity 35%-85%RH)
 Storage Temperature: -40°C~85°C(Humidity 35%-85%RH)
 Motor Protection: Thermal Protected
 Weight: 620 g Packing: 40PCS/CTN





SS

Model Number	Voltage (VAC)	Frequency (Hz)	AirFlow (CFM)	Stat.Pres. (mm-H ₂ O)	Noise (dBA)	Speed (RPM)	Current (mA)	Power (W)	Available Bearing	Curves
FBA1231B11W5C-31	115	50/60	40.6/43.6	16.0/22.9	54.2/56.1	2,750/3,050	270/290	26/27	B,S	①/②
FBA1231B22W5C-31	230	50/60	40.6/43.6	16.0/22.9	54.2/56.1	2,750/3,050	130/130	26/27	B,S	①/②

• For "Sleeve" bearing version, change the "B" in the model number to "S".

Specifications are subject to change without notice

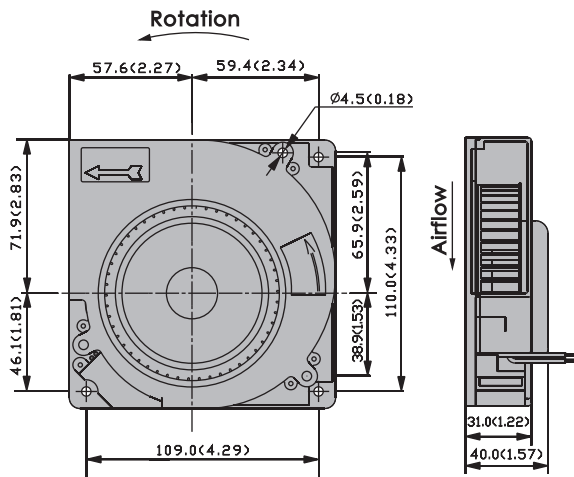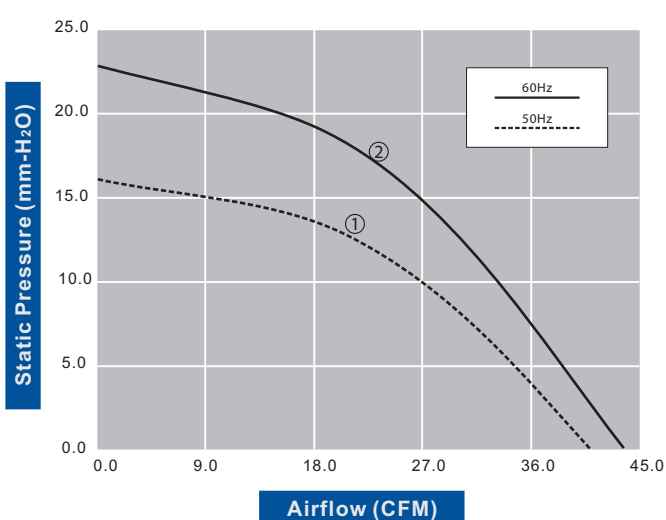

unit: mm(inch)

